

AIR DEHUMIDIFI ERS

Comfortable indoor conditions require humidity control – **COOPER&HUNTER DEHUMIDIFIERS** are the optimal solution for this.

Fast, efficient, and quiet dehumidification is achieved with various types of dehumidifiers. Thanks to the wide range of **COOPER&HUNTER** products, you can choose the dehumidifier that is right for your home. In addition to dehumidifying the air, **COOPER&HUNTER DEHUMIDIFIERS** have unique functions for drying clothes, ionization, and air purification using ultraviolet light and HEPA filters.







WD10 series

CH-D005WD10-12LD UWF

- Wi-Fi control;
- Powerful compressor;
- Condensate drainage into a tank or through a drain hose;
- Two fan speeds: maximum, minimum;
- Humidity maintenance in the range from 30% to 80%;
- Touch control panel;
- Quick drying of clothes;
- Ultraviolet lamp;
- Variable timer;
- Sound-absorbing design;
- Electrostatic air filter;
- Filter contamination indicator;
- Tank full indicator and audible signal when the tank is full;
- Automatic shutdown when the tank is full;
- Mobile movement (wheels) + rubber feet.

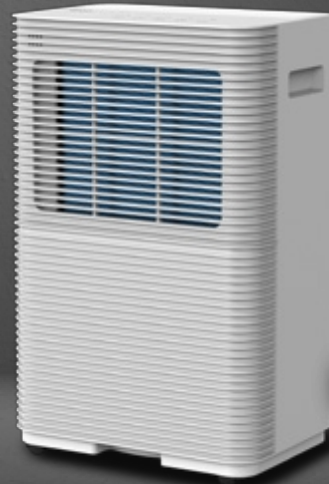
Productivity	l/day	12
Power consumption	W	145
Temperature range	°C	5
Dehumidification area	m	up to 24
Air flow	m ³ /hour	up to 110
Tank capacity	l	2.5
Noise level (min/max)	dB	4
Refrigerant type		R134a
Weight	kg	10.5
Dimensions	mm	310x480x190

WD10 series

CH-D009WD10-20LD UWF

- Wi-Fi control;
- Powerful compressor;
- Condensate drainage into a tank or through a drain hose;
- Two fan speeds: maximum, minimum;
- Humidity maintenance in the range from 30% to 80%;
- Touch control panel;
- Quick drying of clothes;
- Ultraviolet lamp;
- Variable timer;
- Sound-absorbing design;
- Electrostatic air filter;
- Filter contamination indicator;
- Tank fill indicator and audible signal when the tank is full;
- Automatic shutdown when the tank is full;
- Mobile movement (wheels) + rubber feet.

Capacity	l/day	20
Power consumption (min/max)	W	240/300
Temperature range	°	5
Dehumidification area	m	up to 50
Air flow	m ³ /hour	up to 180
Tank capacity	l	3.0
Noise level	dB	36
Refrigerant type		R134a
Weight	kg	10.5
Dimensions	mm	320x537x214



WD8 series

CH-D014WD8-30LDWF

- Wi-Fi control;
- Electronic control;
- Air ionizer;
- 4 operating modes: continuous, comfortable, preset, clothes drying;
- Humidity maintenance in the range from 40% to 70%;
- Two fan speeds: maximum, minimum;
- Condensate drainage into a tank or through a drain hose;
- 24-hour on/off timer;
- Filter contamination indicator (after 250 hours of operation);
- Continuous operation indicator;
- LED display showing current/set humidity level;
- Tank full indicator and audible signal when the tank is full;
- Automatic shutdown when the tank is full;
- Static cleaning filter;
- Mobile movement (wheels).

Productivity	l/day	30
Power consumption	W	490
Temperature range	°C	5
Dehumidification area	m	up to 80
Air flow	m ³ /hour	16
Tank capacity	l	5.5
Noise level	dB	41
Refrigerant type		R410a
Weight	kg	15.5
Dimensions	mm	380x595x229

WD9 Series

CH-D008WD9-16LDWF; CH-D009WD9-20LDWF

- Wi-Fi control;
- Static cleaning filter;
- 3 operating modes: smart, sleep, laundry drying;
- Ionization;
- Three air ventilation speeds;
- 12-hour timer with 1-hour intervals;
- Humidity maintenance in the range from 80% to 40%;
- LED display showing current/set humidity level;
- Child lock;
- Tank full indicator and audible signal when the tank is full;
- Automatic shutdown when the tank is full;
- Automatic defrost mode;
- Auto restart with settings saved;
- Mobile movement (wheels).

Capacity	l/day	16	20
Power consumption	W	245	325
Temperature range	°C		5
Dehumidification area	m	up to 35	up to 50
Air flow	m ³ /hour		125
Tank capacity	l		1.8
Noise level	dB		38
Refrigerant type			R290
Weight	kg	9.6	10.8
Dimensions	mm	290×455×195	



WD8 series

CH-D005WD8-12LDWF

- Wi-Fi control;
- Electronic control;
- 4 operating modes: continuous, comfortable, preset, clothes drying;
- Humidity control in the range from 40% to 70%;
- Two fan speeds: maximum, minimum;
- Condensate drainage into a tank or through a drain hose;
- 24-hour on/off timer;
- Filter contamination indicator (after 250 hours of operation);
- Continuous operation indicator;
- LED display showing current/set humidity level;
- Tank full indicator and audible signal when the tank is full;
- Automatic shutdown when the tank is full;
- Static cleaning filter;
- Mobile movement (wheels).

Productivity	l/day	12
Power consumption	W	145
Temperature range	°C	5
Dehumidification area	m	up to 24
Air flow	m ³ /hour	up to 110
Tank capacity	l	2.5
Noise level (min/max)	dB	4
Refrigerant type		R134a
Weight	kg	10.5
Dimensions	mm	310x480x190

WD8 series

CH-D010WD8-20LDWF

- Wi-Fi control
- Electronic control;
- Air ionizer;
- 4 operating modes: continuous, comfortable, preset, clothes drying;
- Humidity maintenance in the range from 40% to 70%;
- Two fan speeds: maximum, minimum;
- Condensate drainage into a tank or through a drain hose;
- 24-hour on/off timer;
- Filter contamination indicator (after 250 hours of operation);
- Continuous operation indicator;
- LED display showing current/set humidity level;
- Tank full indicator and audible signal when the tank is full;
- Automatic shutdown when the tank is full;
- Static cleaning filter;
- Mobile movement (wheels).

Capacity	l/day	20
Power consumption (min/max)	W	240/300
Temperature range	°	5
Dehumidification area	m	up to 50
Air flow	m ³ /hour	up to 180
Tank capacity	l	3.0
Noise level	dB	36
Refrigerant type		R134a
Weight	kg	10.5
Dimensions	mm	320x537x214



WD2 series

CH-D008WD2-16LDWF

- Built-in Wi-Fi control module
- Electronic control;
- Humidity support in the range from 80% to 30%
- Two fan speeds: high, low;
- Condensate drainage into a tank or through a drain hose;
- 24-hour on/off timer;
- Filter contamination indicator (after 250 hours of operation);
- Continuous operation indicator;
- LED display showing current/set humidity level;
- Tank full indicator and audible signal when the tank is full;
- Automatic shutdown when the tank is full;
- Automatic defrost mode;
- Auto restart with settings saved;
- Mobile movement (wheels) + rubber feet.

Productivity	l/day	16
Power consumption	W	510
Temperature range	°	5
Dehumidification area	m	22
Air flow	m ³ /hour	235/180
Tank capacity	l	3
Noise level (min/max)	dB	39/37
Refrigerant type		R290
Weight	kg	15.5
Dimensions	mm	360×482×244

WD2 series

CH-D010WD2-24LD

- Electronic control;
- Operating modes: automatic and programmable;
- Humidity maintenance in the range from 80% to 30%;
- Two fan speeds: high, low;
- Condensate drainage into a tank or through a drain hose;
- 24-hour on/off timer;
- Filter contamination indicator (after 250 hours of operation);
- Continuous operation indicator;
- LED display showing current/set humidity level;
- Tank fill indicator and audible signal when the tank is full;
- Electrostatic filter with the option of installing an additional filter;
- Automatic shutdown when the tank is full;
- Automatic defrost mode;
- Auto restart with settings saved;
- Mobile movement (wheels and rubber feet)

Capacity	l/day	24
Power consumption (min/max)	W	360/530
Temperature range	°	5
Dehumidification area	m	up to 60
Air flow	m ³ /hour	235/180
Tank capacity	l	3.5
Noise level	dB	41
Refrigerant type		R290
Weight	kg	16
Dimensions	mm	360×482×244



WD2 series

CH-D014WD2-30LD

- Electronic control;
- Humidity control in the range from 80% to 35%;
- Three fan speeds: high, medium, low;
- Condensate drainage into a tank or through a drain hose;
- Timer for switching off and on for 2, 4, or 6 hours;
- Filter contamination indicator (after 250 hours of operation);
- Electrostatic filter with the option of installing an additional filter;
- Continuous operation indicator;
- LED display indicating current/set humidity level;
- Tank full indicator and audible signal when the tank is full;
- Automatic shutdown when the tank is full;
- Automatic defrost mode;
- Auto restart with settings saved;
- Mobile movement (wheels).

Productivity	l/day	30
Power consumption (min/max)	W	394/520
Temperature range	°	5
Dehumidification area	m	up to 80
Air flow	m ³ /hour	235/190
Tank capacity	l	5.5
Noise level	dB	42
Refrigerant type		R290
Weight	kg	15.5
Dimensions	mm	348×555×270

WD6 series

CH-D014WD6-30LDWF

- Built-in Wi-Fi control module;
- Air purification with light indication of air quality;
- HEPA purification filter + Static purification filter;
- UV purification;
- Ionization;
- PM2.5 air pollution sensor;
- Three air ventilation speeds;
- 24-hour timer with 1-hour intervals;
- Humidity maintenance in the range from 80% to 30%;
- Modes: clothes drying, dehumidification, air purification;
- Child lock;
- Blind adjustment;
- Automatic shutdown when the tank is full;
- Automatic defrost mode;
- Auto restart with settings saved;
- Mobile movement (wheels).

Capacity	l/day	30
Power consumption	W	490
Temperature range	°	5
Dehumidification area	m	up to 80
Air flow	m ³ /hour	235/190
Tank capacity	l	5.5
Noise level (min/avg/max)	dB	33/37/41
Refrigerant type		R290
Weight	kg	16.5
Dimensions	mm	350×277×615



WDP7 series

CH-D008WDP7-20LD

- Dehumidification modes: "smart", "constant" (continuous), "quiet", "dry";
- LED display showing current/set humidity level;
- Static cleaning filter
- Three fan speeds: high, medium, low;
- Change in air flow direction;
- Maintaining humidity in the range from 80% to 35%;
- Condensate drainage into a tank or through a drain hose;
- Timer;
- Filter contamination indicator (after 250 hours of operation);
- Tank full indicator and audible signal when the tank is full;
- Automatic shutdown when the tank is full;
- Automatic defrost mode;
- Auto restart with settings saved;
- Air flow direction adjustment;
- Mobile movement (wheels).

WDP7 series

CH-D016WDP7-40LD

- Dehumidification modes: "smart", "constant" (continuous), "quiet", "dry";
- LED display showing current/set humidity level;
- Static cleaning filter
- Three fan speeds: high, medium, low;
- Airflow direction change;
- Humidity maintenance in the range from 80% to 35%;
- Condensate drainage into a tank or through a drain hose;
- Timer;
- Filter contamination indicator (after 250 hours of operation);
- Tank full indicator and audible signal when the tank is full;
- Automatic shutdown when the tank is full;
- Automatic defrost mode;
- Auto restart with settings saved;
- Air flow direction adjustment;
- Mobile movement (wheels).

Productivity	l/day	20
Power consumption (min/max)	W	255/360
Temperature range	°	5
Dehumidification area	m	up to 50
Air flow	m ³ /hour	130/115/105
Tank capacity	l	4
Noise level	dB	32
Refrigerant type		R290
Weight	kg	15.5
Dimensions	mm	363×577×245

Capacity	l/day	40
Power consumption (min/max)	W	425/670
Temperature range	°	5
Dehumidification area	m	up to 100
Air flow	m ³ /hour	230/195/170
Tank capacity	l	7
Noise level	dB	40
Refrigerant type		R290
Weight	kg	22.5
Dimensions	mm	396 x 625 x 286



WDN7 series

CH-D008WDN7-20LD

- Dehumidification modes: "smart", "constant" (continuous), "quiet", "dry";
- LED display showing current/set humidity level;
- Static cleaning filter
- Three fan speeds: high, medium, low;
- Airflow direction change;
- Humidity maintenance in the range from 80% to 35%;
- Condensate drainage into a tank or through a drain hose;
- Timer;
- Filter contamination indicator (after 250 hours of operation);
- Tank full indicator and audible signal when the tank is full;
- Automatic shutdown when the tank is full;
- Automatic defrost mode;
- Auto restart with settings saved;
- Air flow direction adjustment;
- Mobile movement (wheels).

Productivity	l/day	20
Power consumption (min/max)	W	255/360
Temperature range	°	5
Dehumidification area	m	up to 50
Air flow	m ³ /hour	130/115/105
Tank capacity	l	4
Noise level	dB	32
Refrigerant type		R290
Weight	kg	15.0
Dimensions	mm	367×582×246

WDN7 series

CH-D008WDN7-40LD

- Dehumidification modes: "smart", "constant" (continuous), "quiet", "dry";
- LED display showing current/set humidity level;
- Static cleaning filter
- Three fan speeds: high, medium, low;
- Airflow direction change;
- Maintaining humidity in the range from 80% to 35%;
- Condensate drainage into a tank or through a drain hose;
- Timer;
- Filter contamination indicator (after 250 hours of operation);
- Tank full indicator and audible signal when the tank is full;
- Automatic shutdown when the tank is full;
- Automatic defrost mode;
- Auto restart with settings saved;
- Air flow direction adjustment;
- Mobile movement (wheels).

Capacity	l/day	40
Power consumption (min/max)	W	425/670
Temperature range	°	5
Dehumidification area	m	up to 100
Air flow	m ³ /hour	230/195/170
Tank capacity	l	7
Noise level	dB	40
Refrigerant type		R290
Weight	kg	21.5
Dimensions	mm	390 x 628 x 286



WDC series

CH-D005WD8-12LDWF

- Built-in Wi-Fi control module;
- Static cleaning filter;
- Condensate drainage into a tank or through a drain hose;
- 3 operating modes: smart, sleep, laundry drying;
- Air ionizer;
- Three air ventilation speeds;
- 12-hour timer with 1-hour intervals;
- Humidity maintenance in the range from 70% to 40%;
- LED display showing current/set humidity level;
- Child lock;
- Tank full indicator and audible signal when the tank is full;
- Automatic shutdown when the tank is full;
- Automatic defrost mode;
- Auto restart with settings saved;
- Mobile movement (wheels).

Productivity	l/day	12
Power consumption	W	145
Temperature range	°C	5
Dehumidification area	m	up to 24
Air flow	m ³ /hour	up to 110
Tank capacity	l	2.5
Noise level (min/max)	dB	42
Refrigerant type		R134a
Weight	kg	10.5
Dimensions	mm	310x480x190









WDC series

CH-D010WD8-20LDWF

- Built-in Wi-Fi control module;
- Static cleaning filter;
- Condensate drainage into a tank or through a drain hose;
- 3 operating modes: smart, sleep, laundry drying;
- Air ionizer;
- Three air ventilation speeds;
- 12-hour timer with 1-hour intervals;
- Humidity maintenance in the range from 70% to 40%;
- Color indicator of air humidity: Dry (orange), comfortable (light blue), humid (blue).
- LED display showing current/set humidity level;
- Child lock;
- Tank full indicator and audible signal when the tank is full;
- Automatic shutdown when the tank is full;
- Automatic defrost mode;
- Auto restart with settings saved;
- Mobile movement (wheels).

Capacity	l/day	20
Power consumption (min/max)	W	240/300
Temperature range	°	5
Dehumidification area	m	up to 50
Air flow	m ³ /hour	up to 180
Tank capacity	l	3.0
Noise level	dB	36
Refrigerant type		R134a
Weight	kg	10.5
Dimensions	mm	320x537x214

CONVENTIONAL SYMBOLS

	Heating mode		Filter contamination sensor
	Cooling mode		Water filters
	Humidification mode		Ceramic heating element Backlight
	Dehumidification mode		Night mode
	eco clothes		
	drying mode SMART ECO mode		Quiet mode
	Timer mode		PM2.5 air pollution sensor
	Automatic shutdown		VOC air pollution sensor Ultrasonic
	Automatic protection		humidification NatureCloud
	Manual control		humidification technology
	Control sensor		Aroma capsule
	Informative LED display		Top water refill
	Child lock		Bottom loading of water bottle
	Water tank		Top loading water bottle Cold water
	Automatic humidity control		Hot water
	Energy-efficient		Room temperature water
	Mobile movement (wheels).		
	Fall protection		Electronic water cooling
	Antibacterial coating		Compressor water cooling
	Multi-speed fan		Handle for easy movement of the device
	CH-SMART ION filter		Remote control included
	Multi-layer filter		WiFi remote control
	HEPA filter		R134a refrigerant
			R410A
			R290
			refrigerant R410a refrigerant
			R290 refrigerant